


24V C.C. - D.C.

9000-30100341
PUHALTAVA

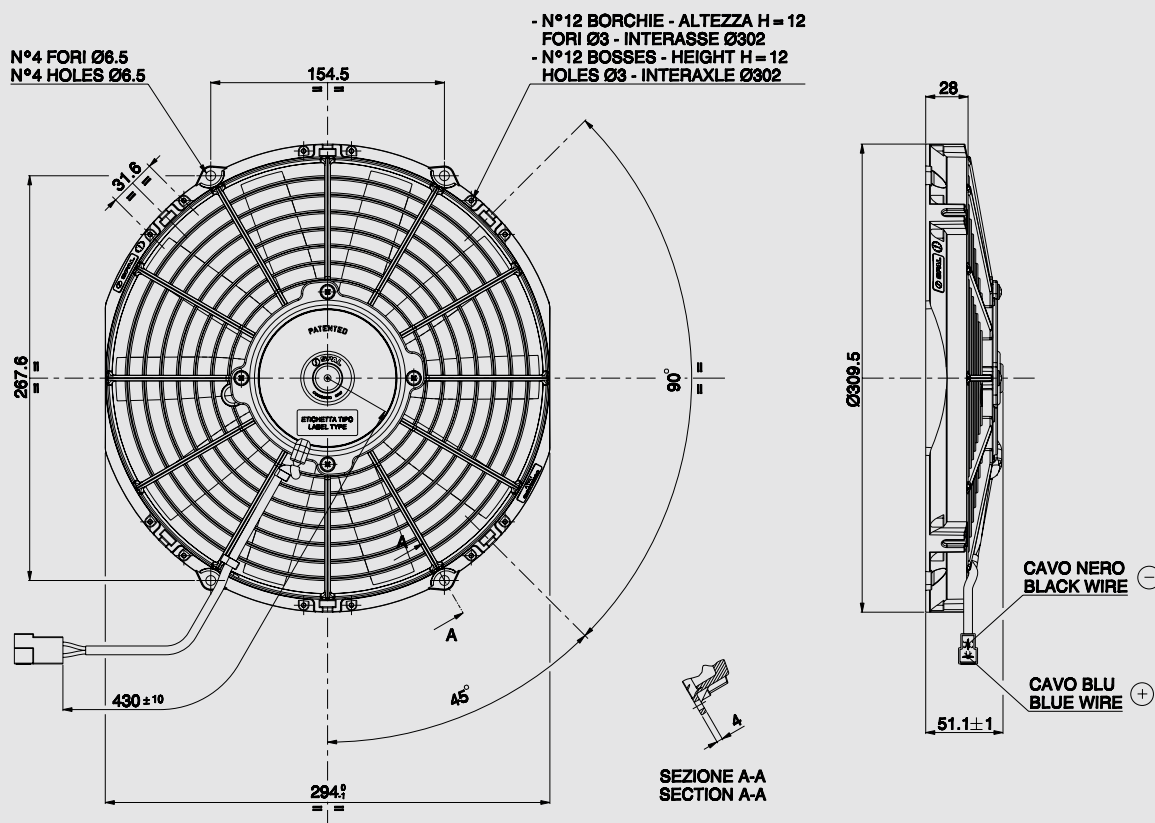

AMP connector Code 180908

AMP terminal Code 42098-2

Suggested mounting torque: 3(+1/-0) Nm with screw M5

Weight 1.1 Kg. approx.

Connettore AMP Cod. 180908

Terminali AMP Cod. 42098-2

Coppia di serraggio consigliata: 3(+1/-0) Nm con vite M5

Peso 1,1 Kg. circa

Ø 280 mm

Ø 11"

suction / aspirante

blowing / soffiante

PRODUCT FEATURES
CARATTERISTICHE PRODOTTO

Static pressure Pressione statica mm H ₂ O	Airflow Portata m ³ /h	Current input Corrente assorbita A	Airflow Portata CFM	Airflow Portata m ³ /h	Current input Corrente assorbita A	Airflow Portata CFM	Static pressure Pressione statica in H ₂ O
0	1380	3,7	814	1370	3,6	808	0
2,5	1230	3,9	726	1250	3,8	738	0,1
5	1090	3,9	643	1100	3,8	649	0,2
7,5	970	3,9	572	990	3,9	584	0,3
10	750	3,8	443	760	3,9	448	0,4
12,5	520	3,6	307	630	3,9	372	0,5
15	390	3,8	230	260	3,7	153	0,6
17,5	250	3,8	148	0	3,8	0	0,7
20	140	3,9	83				0,8
25	0	3,9	0				1

Waterproof motor, IP 68
Motore chiuso, IP 68



Long life / Lunga durata



Test voltage 26 V. D.C. - Tensione di prova 26 V. c.c.