


24V C.C. - D.C.

9000-30100390  
IMEVÄ

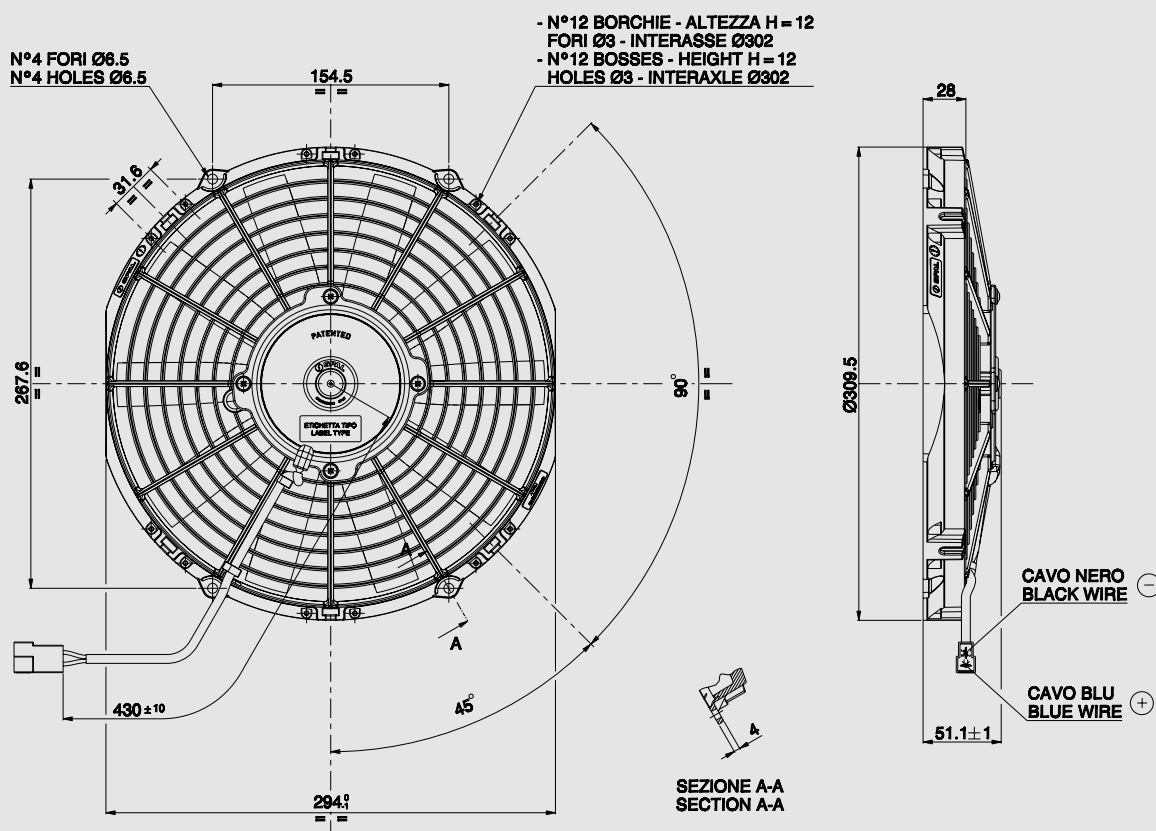

AMP connector Code 180908  
AMP terminal Code 42098-2  
Suggested mounting torque: 3(+1/-0) Nm with screw M5  
Weight 1.1 Kg. approx.

Connettore AMP Cod. 180908  
Terminali AMP Cod. 42098-2  
Coppia di serraggio consigliata: 3(+1/-0) Nm con vite M5  
Peso 1,1 Kg. circa

Ø 280 mm

Ø 11"

suction / aspirante

blowing / soffiante

PRODUCT FEATURES  
CARATTERISTICHE PRODOTTO

| Static pressure<br>Pressione statica<br>mm H <sub>2</sub> O | Airflow<br>Portata<br>m <sup>3</sup> /h | Current input<br>Corrente assorbita<br>A | Airflow<br>Portata<br>CFM | Airflow<br>Portata<br>m <sup>3</sup> /h | Current input<br>Corrente assorbita<br>A | Airflow<br>Portata<br>CFM | Static pressure<br>Pressione statica<br>in H <sub>2</sub> O |
|-------------------------------------------------------------|-----------------------------------------|------------------------------------------|---------------------------|-----------------------------------------|------------------------------------------|---------------------------|-------------------------------------------------------------|
| 0                                                           | 1450                                    | 4,6                                      | 856                       | 1460                                    | 4,5                                      | 861                       | 0                                                           |
| 2,5                                                         | 1370                                    | 4,6                                      | 808                       | 1330                                    | 4,6                                      | 785                       | 0,1                                                         |
| 5                                                           | 1240                                    | 4,7                                      | 732                       | 1250                                    | 4,5                                      | 738                       | 0,2                                                         |
| 7,5                                                         | 1090                                    | 4,7                                      | 643                       | 1120                                    | 4,6                                      | 661                       | 0,3                                                         |
| 10                                                          | 890                                     | 4,6                                      | 525                       | 1010                                    | 4,7                                      | 596                       | 0,4                                                         |
| 12,5                                                        | 650                                     | 4,4                                      | 384                       | 750                                     | 4,8                                      | 443                       | 0,5                                                         |
| 15                                                          | 530                                     | 4,6                                      | 313                       | 500                                     | 4,7                                      | 295                       | 0,6                                                         |
| 17,5                                                        | 340                                     | 4,6                                      | 201                       | 320                                     | 4,6                                      | 189                       | 0,7                                                         |
| 20                                                          | 260                                     | 4,7                                      | 153                       | 120                                     | 4,6                                      | 71                        | 0,8                                                         |
| 22,5                                                        | 160                                     | 4,6                                      | 94                        | 0                                       | 4,6                                      | 0                         | 0,9                                                         |
| 25                                                          | 0                                       | 4,6                                      | 0                         |                                         |                                          |                           | 1                                                           |

Waterproof motor, IP 68  
Motore chiuso, IP 68



Long life / Lunga durata



Test voltage 26 V. D.C. - Tensione di prova 26 V. c.c.