


24V C.C. - D.C.

9000-30102546
PUHALTAVA




- N°4 BORCHIE - ALTEZZA H=7.5
FORI Ø6.5 - INTERASSE Ø336.9 ±0.2
- N°4 BOSSSES - HEIGHT H=7.5
HOLES Ø6.5 - INTERAXLE Ø336.9 ±0.2

- N°4 GANCI PER PERNI Ø6
INTERASSE Ø340.1 ±0.2
- N°4 HOOKS Ø6
INTERASSE Ø340.1 ±0.2

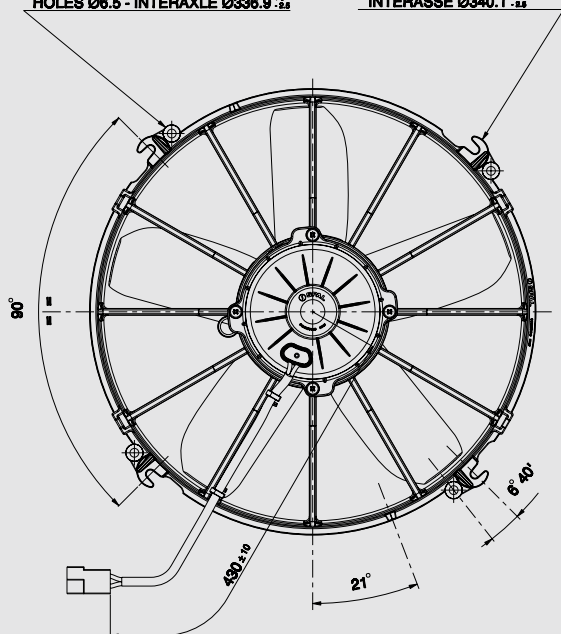

SEDE PER ANELLO IN GOMMA
RUBBER RING HOUSING

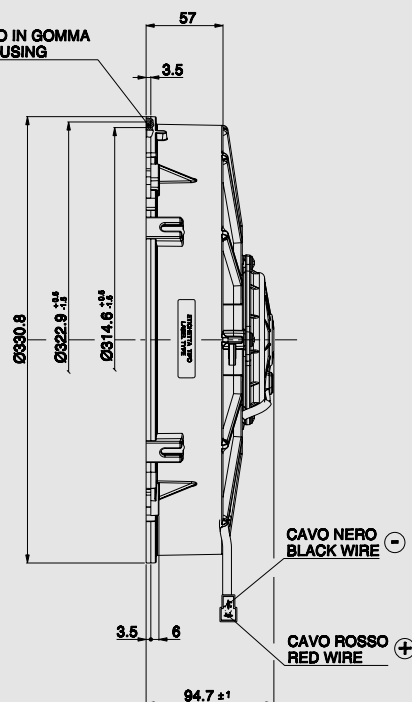

AMP connector Code 180908

AMP terminal Code 42098-2

Suggested mounting torque: 3(+1/-0) Nm with screw M5

Weight 2.35 Kg. approx.

Connettore AMP Cod. 180908

Terminali AMP Cod. 42098-2

Coppia di serraggio consigliata: 3(+1/-0) Nm con vite M5

Peso 2,35 Kg. circa

Ø 305 mm

Ø 12"

suction / aspirante

blowing / soffiante

PRODUCT FEATURES
CARATTERISTICHE PRODOTTO

Static pressure Pressione statica mm H ₂ O	Airflow Portata m ³ /h	Current input Corrente assorbita A	Airflow Portata CFM	Airflow Portata m ³ /h	Current input Corrente assorbita A	Airflow Portata CFM	Static pressure Pressione statica inH ₂ O
0	2900	7,4	1711	2760	7,1	1628	0
5	2640	8,0	1558	2510	7,5	1481	0,2
10	2310	8,4	1363	2230	8,0	1316	0,4
15	1860	8,5	1097	1920	8,4	1133	0,6
20	1210	8,8	714	1470	8,6	867	0,8
25	900	9,2	531	1010	8,9	596	1
30	670	9,5	395	620	9,2	366	1,2
35	370	10,0	218	310	9,7	183	1,4
40	0	11,1	0	0	10,5	0	1,6

Waterproof motor, IP 68
Motore chiuso, IP 68



Long life / Lunga durata



Test voltage 26 V. D.C. - Tensione di prova 26 V. c.c.